




Marelli

Industrial Ventilation Solutions

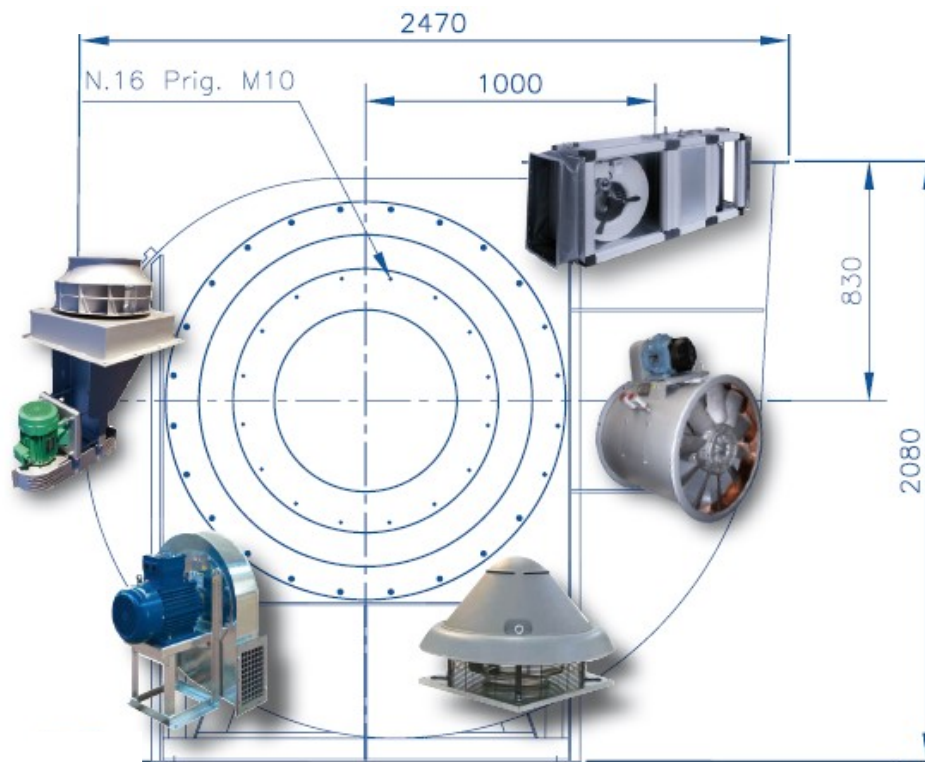

MARELLI srl
Rue Bollinckxstraat 241-243
BE – 1190 Brussels

Tel : +32 (0)2 511 06 03
www.marelli.be
sales@marelli.be

Table of contents


1. Our company	page 3
2. A long history full of experience	page 4
3. Quality Management System	page 7
4. Our services	page 8
5. Our commitments	page 9
6. Stay connected !	page 10
7. References	page 11
8. Our partners	page 12
9. Our products	page 13
9.1. Ventilation & HVAC	page 14
9.2. Fans for industrial process	page 43
9.3. 'Heavy-duty' fans	page 62
9.4. Side-channel blowers	page 68
9.5. Destratifiers HVLS	page 74
9.6. Axial impellers	page 76

1. OUR COMPANY

Created in **1891** in Milan (Italy) by **Ercole Marelli**, the company was producing electromechanical products.




ErcoleMarelli

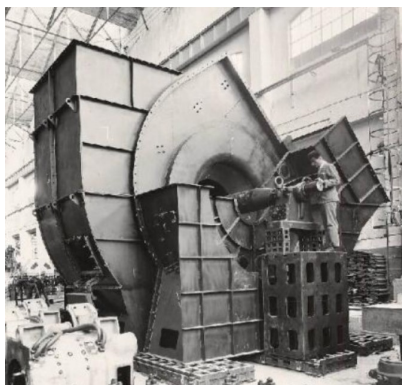

From 1896, MARELLI started the production of the first 'agitatori d'aria' in Europe, precursors of the present fans. Later, it developed its industrial activities by producing electrical motors, water pumps, industrial alternators, high power transformers,...

For **100 years**, MARELLI has been represented in Belgium (1920). Our company has gained a **solid reputation** in the industrial ventilation sector and advice, market, assemble and distribute its products to the industrial customers, as final users, integrators, engineering offices and fitters.

Our range of products meets **all requirements**, from the simplest use to the most complex industrial unit, including severe conditions, and are used in dedusting, carpentry, glass-making, plant ventilation, grinding plants, food industry, cement industry, paper mills, HVAC, steel industry, (petro)chemical industry, agriculture, shipbuilding, textile manufactures, animal farms, ovens and boilers, painting rooms, ...

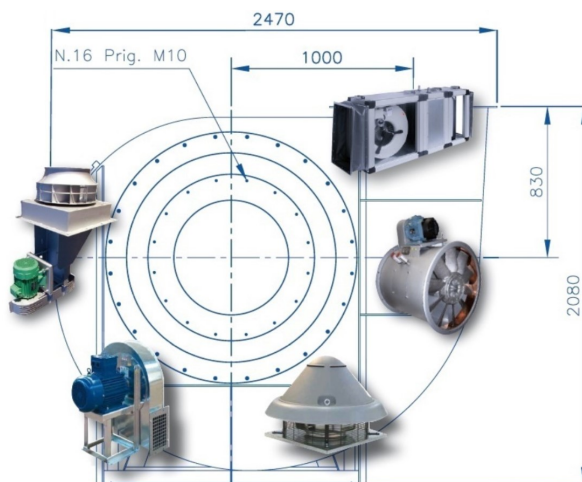

2. A LONG HISTORY RICH OF EXPERIENCES

2021 :



Beginning of the sale representation of **MARELLI VENTILAZIONE** company (Italy), producer of industrial fans, offering a full range of low, medium and high pressure centrifugal fans and a range of robust axial fans. Specialized in the production of fans for ovens for bread, pastries and pasta, Marelli Ventilazione boasts an experience of more than a century and has developed a specific fan to meet every need.

2020 : Marelli celebrates its **100 years** (1920 – 2020) in Belgium !
Now, our aim is to continue our expansion based on this long experience and on the development of new products and technologies for our customers.



2019 :



beginning of the sale representation of **EVEL** company (Italy), producer of industrial destratifiers (HVLS), with diameter from 2,5 to 7 m, for airflow up to 850.000 m³/h. For applications as production rooms, storage premises, zootechnics, agriculture ...


2018 : new certificate **ISO 9001:2015** with a totally new scope, totally oriented to the customer satisfaction

2018 : beginning of the sale representation of **HD FANS** company (Italy), specialized in the production of 'heavy-duty' and customized fans with flow rate up to 2.000.000 m³/h and pressure up to 3.500 mmH₂O.



2015 : modification of the text from our logo to '**Industrial Ventilation Solutions**', emphasizing the search for the best technical solution in industrial ventilation for our customers. Marelli does not only search a fan, but a solution for its customer.

2014 : start of the sale representation of **ESAM** company (Italy), producer of industrial side channel blowers



2012 : our new Internet site www.marelli.be is online ! More friendly to use and with more technical data about our fans and impellers.


2011 :



beginning of the sale representation of **FISCHBACH** company (Germany), offering a complete range of compact industrial fans and AHU with 100% controllable motor, especially designed for HVAC applications.

2009 : MARELLI passed the certification Audit that ensures the adaptation of MARELLI's management system to the standard of **ISO 9001:2008**.


2008 : beginning of the sale representation of **HASCON** company (Italy), specialized in the production of axial impellers.



2006 : new management. A **new commercial spirit** is given, giving priority to the optimal research of technical solutions answering the customer requests.

1998 : creation of the Marelli-**BALTOGAR** company, producer of heavy-duty fans

1986 : creation of **DYNAIR** company (Italy), and representation in Belgium, with a new range of fans, completing the existing one.



1981 : creation of **EUROVENTILATORI** company (Italy), that took over the production and sales of the Ercole Marelli fans, that we continue to distribute in Belgium.

1981 : big financial difficulties, judicial inquiry and compulsory liquidation. The group is split in several new companies.

1968 : due to an important fall in prices in the electro-mechanical sector, restructuration in 4 sectors : energy, road and rail systems, mass production and aero-technics.

1963 :



Marelli becomes a **worldwide group**, active in the industrial sector. Staff exceeds 7.100 people.


1930 : production of power plants for steel industry, shipbuilding and for rail and road transport. Beginning of the production of industrial pumps for civil engineering.

1922 : production of industrial alternators and high power transformers.

1920 : creation of the Belgian subsidiary and beginning of the **sales representation** in Belgium of the Marelli products.



1905 :

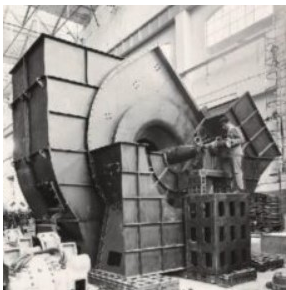

beginning of the production of electrical motors, water pumps and **industrial fans**

1896 : production of the first '**agitatori d'aria**' in Europe, precursor of the present fans.

1891 : creation of the Italian **Ercole Marelli** company in Milan.



ErcoleMarelli

3. QUALITY MANAGEMENT SYSTEM :

After offering a high quality service for years, Marelli has engaged from 2009 in a policy of **Quality Management System**, certified according to the ISO 9001 standards.

The **aims** are multiple : to ensure the industrial customer (final customers, engineering offices, fitters and OEM) satisfaction, to guarantee the quality and traceability of the goods and services offered by Marelli, to speak the same language than the customer, to assure the continuity of the company, to anticipate the risks and opportunities of the activity and to distinguish ourselves from the competition.

Based on the existing issues and on the expectation of the customers, our company is focusing on the **understanding** of the customer request and in offering him the **best solution** best solution answering its **needs**.

From the 13th of September 2018, we have passed our new certification audit of 'Bureau Veritas' that ensures the adaptation of MARELLI's management system to the standard of **ISO 9001:2015**, with a new scope :

“Listening and advising the customer for the selection, manufacturing, distribution and after-sales service of industrial ventilation systems”

In order to guarantee this quality level, we commit ourselves :

- to insure the traceability follow-up, in order to guarantee all the customer requirements from the quotation to the after-sales services.
- to devote the necessary time and budget to carry out and to improve our Quality System.
- to continue the technical and normative watch.
- to periodically realize an appraisal of our system in order to make improvements suggestions.



4. OUR SERVICES

CUSTOMER ORIENTED

Thanks to a **personalized relation**, the customer is really the center of your concerns !

To offer the best products to its customers, MARELLI will deal, **deftly** and **softly**, with all the necessary aspects: technical, but also budget, planning and quality.



Working point :			
air flow :	6170	m³/h	medium
	102.93	m³/min	At
	1.7154	m³/s	temperature inlet :
	5554	Nm³/h	temperature outlet :
static flow :	2.11	kg/s	sea level :
air speed inlet :	21.2	m/s	barometric pressure :
air speed outlet :	23.27	m/s	pressure suction side :
			humidity :
			density :
			norm density :
at 20 °C :			
total pressure :	3427.84	Pa	at 15 °C :
	350.88	mmWS	total pressure :
static pressure :	34.38	mbar	
	3113.21	Pa	static pressure :
	317.46	mmWS	
	31.14	mbar	static pressure suction side :
static pressure suction side :	-269.58	Pa	
static pressure suction side :	2113.21	Pa	static pressure suction side :
dyn pressure suction side :	269.58	Pa	
dyn pressure suction side :	264.75	Pa	dyn pressure suction side :
absorbed power :	6.98	kW	absorbed power :
Mechanical data :			
efficiency :	84.52	%	Sound data :
inlet dimension (sample) :	321	Ø mm	LWA 0 :
inlet weight :	18	kg	LWA 1 :
outlet dimensions :	322 x 229	mm	LWA 2 :
inlet speed :	2.4	kg x m³	LWA 3 :
inlet diameter :	500	Ø mm	LWA 4 :
peripheral speed :	78.2	m/s	LWA 5 :
tip speed :	2910	1/min	LWA 6 :
class :	1		
Electrical data :			
motor power :	11	kW	LPA 0 and LPA 1 : inlet and outlet ducted
motor speed :	2910	1/min	LPA 1 and LPA 2 : inlet and outlet not ducted
nominal current :	16.91	A	LPA 2 and LPA 3 : inlet and outlet not ducted
tension :	400	V	
frequency :	50	Hz	

CLEAR FACTS

All our quotations are **clear** and **detailed**, and are usually composed by an introduction with the customer requests summary, a complete technical presentation of the suggested product (description, curves, dimensions, accessories,..) and a commercial offer with price, delivery time, payment conditions,...

Moreover, our Quality System guarantees a **complete traceability** of the customer files : from first contact to after-sales service, each file is followed up day-by-day.

EXPERIENCE

With **100 years** of experience, MARELLI is your specialist for industrial ventilation solutions. MARELLI distributes industrial equipment developed and built by **well-known producers** of the industrial ventilation field, each of them with a long experience in ventilation.



EXTENDED RANGE OF PRODUCTS

Thanks to more than **3.000** different references of fans in standard execution, MARELLI meets all requirements, from the simplest use to the most complex industrial unit.

Each model can be equipped with several motors, or can be adapted to answer specific working conditions (ATEX, high temperatures, corrosion resistant,...).

The air flow range of our fans starts from 100 m³/h up to **270.000 m³/h**, with pressure levels up to **5.000 mmH₂O** in standard configurations.

For higher or specific working points, we develop for our customers hand-made fans answering their requests (up to 2.000.000 m³/h with our range of 'heavy-duty' fans).



5. OUR COMMITMENTS :




Our commitments are various :

- to **listen**, to **understand** and to **advise** our customers
- in order to offer him a **quality** and **long-lasting product**
- that is best adapted to its technical and budget **needs**
- respecting its **requests** (respect of its schedule and respect of our quotation)
- answering its **expectations** regarding competences, service, reactivity, flexibility, delivery compliance and traceability
- in full **respect** of the existing norms, rules and commercial good practices.

6. STAY CONNECTED !

Continuously updated **internet site** : www.marelli.be

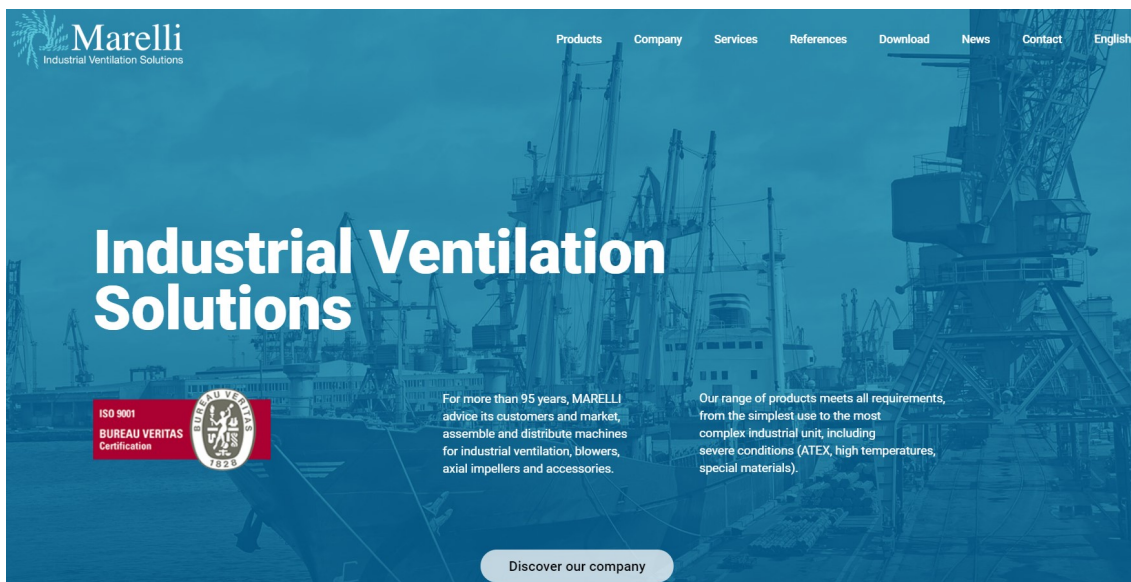

Newsletters (maximum 10 / year !) :

Keep updated with our 'Newsletter' :

- new products
- useful technical information
- temporary promotions and discounts
- convenient information (closing,...)



7. REFERENCES



Our range of products meets all requirements, from the simplest use to the most complex industrial unit, including severe conditions, and are used in

dedusting
glass-making
grinding plants
cement industry
HVAC
(petro)chemical industry
shipbuilding
animal farms
painting rooms

carpentry
plant ventilation
food industry
paper mills
steel industry
agriculture
textile manufactures
ovens and boilers
...



8. OUR PARTNERS

MARELLI offers its customer all the equipments used in the industrial ventilation produced by **well-known players** of the world-wide industrial ventilation field as :



and others on request.

9. OUR PRODUCTS

Our products are divided in **6 segments** :



Ventilation & HVAC

Page 14



Fans for industrial process

Page 43



"Heavy-duty" fans

Page 62



Blowers

Page 68



Destratifiers

Page 74



Axial impellers

Page 76

9.1. Ventilation and HVAC fans :



Direct driven centrifugal fans

Page 15



Transmission driven centrifugal fans

Page 21



Ducted axial fans

Page 25



Plate-mounted axial fans

Page 28



Roof fans

Page 31




Box fans and AHU

Page 34



HVAC fans

Page 36

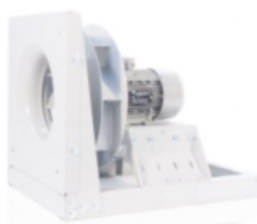

Plug fans

Page 38



In-line fans

Page 39



Heat recovery fans

Page 41

1. Direct driven centrifugal fans

Pictures *	Type	General description *
	MDY-DIC	<p>V = 50 - 2.400 m³/h P = 300 - 1.000 Pa</p> <p> </p> <p>Small size forward curved blade centrifugal fan. Impeller diameter from 100 to 180 mm. Directly coupled motor.</p> <p>Use : all industrial applications where small air volumes and high pressures are requested. Clean air and not-dusty air and smokes.</p> <p>Temperature max: 80°C.</p> <p>Option : available in stainless steel AISI 304, « AT » version (150°C continuous) and/or ATEX version.</p>
	MFI-CEK (EC)	<p>V = 0 - 4.000 m³/h P = max 600 Pa</p> <p> </p> <p>Compact single inlet fan, with internal disc-rotor motor, 100% adjustable voltage, IP65.</p> <p>NEW : EC motor</p> <p>Use : industrial kitchens.</p> <p>Temperature max : up to 80°C continuous (peak 100°C).</p>
	MDY-AL	<p>V = 200 - 16.000 m³/h P = 100 - 1.600 Pa</p> <p></p> <p>Forward curved blade centrifugal fan. Directly coupled motor.</p> <p>Use : used in the civil and industrial ventilation plants, heating and air conditioning. Clean air and light smoke.</p> <p>Temperature max : 80°C.</p> <p>Option : available in ATEX version.</p>
	MMA-MVCRL	<p>V = 200 – 12.000 m³/h P = 0 – 2.700 Pa</p> <p> </p> <p>Backward curved blade centrifugal fan. Directly coupled motor.</p> <p>Use : dedusting, drying, cooling, industrial hoods, process,...</p> <p>Temperature max : +120°C.</p> <p>Option : +250°C version, stainless steel fan</p>

Pictures *	Type	General description *
	MMA-MVCMT	<p>V = 0 – 13.000 m³/h P = 0 – 4.000 Pa</p> <p>Centrifugal fan with straight blade impeller. Directly coupled motor.</p> <p>Use : transport of dust and solids</p> <p>Temperature max : +120°C.</p> <p>Option : +250°C version, ATEX version</p>  
	MSP-CRMT-HT	<p>V = 300 - 15.000 m³/h P = 10-2.300 Pa</p> <p>Forward curved blade centrifugal fan. Directly coupled motor. With special coating and cooling fan.</p> <p>Use : professional kitchens, furnaces, painting booths, foundries,...</p> <p>Temperature max : 300°C continuous, 400°C/2H.</p>  
	MDY-F	<p>V = 100 – 1.050 m³/h P = 300 - 2100 Pa</p> <p>Radial blade centrifugal fan in aluminum. Low noise level. 4 models. Directly coupled motor.</p> <p>Use : for industrial application where small air volumes and high pressures are requested. Clean air and not-abrasive dusty air and smoke.</p> <p>Temperature max : 80°C.</p>
	MMA-MVCMA	<p>V = 0 – 1.000 m³/h P = 0 – 1.750 Pa</p> <p>Centrifugal fan with open impeller in aluminum. Directly coupled motor.</p> <p>Use : cooling, drying, pneumatic transport, process, waste treatment.</p> <p>Temperature max : +120°C.</p> <p>Option : +250°C version, ATEX version</p>  

Pictures *	Type	General description *
	MMA-MVCA	  $V = 0 - 1.250 \text{ m}^3/\text{h}$ $P = 0 - 5.800 \text{ Pa}$ High pressure centrifugal fan with open impeller in aluminum. Directly coupled motor. Use : cooling, drying, pneumatic transport, process, waste treatment. Temperature max : +120°C. Option : +250°C version, ATEX version
	MDY-PR-Q AT	  $V = 200 / 8.800 \text{ m}^3/\text{h}$ $P = 50 - 900 \text{ Pa}$ Backward curved blade centrifugal fan with quadrangular construction. Reduced dimensions (absence of motor support). Use: all industrial applications: process, industrial kitchen,...Clean or slightly dusty air. Temperature max : +200°C continuous. Option : 400°C/2H (MDY-PR-Q-HT-2V)
	MFI-HE / HD (EC)	 $V = 0 - 20.000 \text{ m}^3/\text{h}$ $P = \text{max } 1.700 \text{ Pa}$ High efficiency single (HE) or double inlet fan (HD) with backward curved impeller with disc-motor rotor, 100% controllable, IP65, low sound. NEW : EC motor Use : air conditioning, clean room, industrial kitchens, industry, engine building. Clean air. Temperature max : 70°C.
	MDY-PR-AC	  $V = 300 - 17.450 \text{ m}^3/\text{h}$ $P = 50 - 1.500 \text{ Pa}$ Centrifugal fan in plastic material (PE or PP), low noise, high efficiency. Use: smoke and corrosive vapors and smokes, high humidity air,.. Temperature max : 70°C. Option : available in ATEX version and anti-static self-extinguishing PE (PER) See also our composite and plastic fans range.

Pictures *	Type	General description *
	MMA-BC	   V = 600 - 35.000 m³/h P = 200 – 4.000 Pa Low pressure centrifugal fan with backward curved blade. Direct coupled motor. Use: ventilation, filtration, process, cooling systems,... Clean or slightly dusty air. Temperature max: +90°C Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.
	MMA-MA	   V = 600 – 200.000 m³/h P = 700 – 5.500 Pa Medium pressure centrifugal fan with backward curved blade. Direct coupled motor. Use: transport of dusty air and with small size granular material Temperature max: +90°C Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.
	MMA-MB	   V = 700 – 250.000 m³/h P = 700 – 7.500 Pa Medium pressure centrifugal fan with backward curved blade. Direct coupled motor. Use: transport of dusty air and with small size granular material Temperature max: +90°C Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.
	MMA-MC	   V = 700 - 9.000 m³/h P = 1.400 – 10.000 Pa Medium pressure centrifugal fan with backward curved blade. Direct coupled motor. Use: transport of very dusty air and with small size granular material suspended in the air Temperature max: +90°C Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.

Pictures *	Type	General description *
	MMA-MD	<p>V = 2.00 - 200.000 m³/h P = 1.500 – 10.000 Pa</p> <p>Medium pressure centrifugal fan with backward curved blade. Direct coupled motor.</p> <p>Use: transport of very dusty air and with small size granular material suspended in the air</p> <p>Temperature max: +90°C</p> <p>Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.</p>
	MMA-AB	<p>V = 1.000 - 40.000 m³/h P = 1.000 – 20.000 Pa</p> <p>High pressure centrifugal fan with backward curved blade. Direct coupled motor.</p> <p>Use: for clean or dusty air</p> <p>Temperature max: +90°C</p> <p>Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.</p>
	MMA-AE	<p>V = 100 – 1.800 m³/h P = 1.600 – 17.000 Pa</p> <p>High pressure centrifugal fan with backward curved blade. Direct coupled motor.</p> <p>Use: for clean or dusty air</p> <p>Temperature max: +90°C</p> <p>Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.</p>
	MMA-AF	<p>V = 500 / 8.000 m³/h P = 2.000 / 17.000 Pa</p> <p>High pressure centrifugal fan with backward curved blade. Direct coupled motor.</p> <p>Use: for clean or dusty air</p> <p>Temperature max: +90°C</p> <p>Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.</p>

Pictures *	Type	General description *
	MMA-TA	   V = 300 / 14.000 m³/h P = 1.500 / 10.000 Pa Open blade centrifugal fan. Directly coupled motor. Use : designed for very dusty air and with material suspended in the air. Max air temperature : +90°C Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.
	MMA-TB	   V = 400 / 10.000 m³/h P = 500 / 8.500 Pa Open blade centrifugal fan. Directly coupled motor. Use : designed for very dusty air and with material suspended in the air. Max air temperature : +90°C Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.
	MMA-TC	   V = 2.000 / 20.000 m³/h P = 500 / 3.500 Pa Open blade centrifugal fan. Directly coupled motor. Use : designed for very dusty air and with material suspended in the air. Max air temperature : +90°C Option : ATEX version, « AT » version (max 150° or 300°C) or INOX version.
	MDY-CC-JC HT	V = 5.400 – 9.700 m³/h S = 26 – 30 m/s Centrifugal induction fan for car parks and tunnels ventilation. F300/120 certified according to EN 12101-3. Dual purpose fan, for normal ventilation and smoke extract in case of fire.





* The above pictures and descriptions are not contractual and not exhaustive

2. Belt driven centrifugal fans

Pictures *	Type	General description *
	MMA-LM/R	<p>V = 400 - 10.000 m³/h P = 300 - 2.000 Pa</p> <p>Belt-driven centrifugal fan, with cooling fan on shaft.</p> <p>Use: hot air extraction</p> <p>Temperature max : +300°C.</p> <p>Option : stainless steel.</p>
	MMA-MVCMP	<p>V = 200 – 25.000 m³/h P = 500 – 2.500 Pa</p> <p>Belt-driven centrifugal fan, with forward-curved impeller blades. Motor on casing or bench.</p> <p>Use : hot air extraction</p> <p>Temperature max : +150°C.</p> <p>Option : version +250°C, ATEX construction, stainless steel fan</p>
	MMA-BC/R	<p>V = 600 – 35.000 m³/h P = 200 – 4.000 Pa</p> <p>Low pressure centrifugal fan. High efficiency reverse-blade impeller. Belt-driven.</p> <p>Use : for clean and slightly dusty air</p> <p>Temperature max : +300°C.</p> <p>Option : ATEX construction, stainless steel fan</p>
	MMA-MA/R	<p>V = 600 – 200.000 m³/h P = 700 – 5.500 Pa</p> <p>Medium pressure centrifugal fan. High efficiency reverse-blade impeller. Belt-driven.</p> <p>Use : for dusty air with small size granular material</p> <p>Temperature max : +300°C.</p> <p>Option : ATEX construction, stainless steel fan</p>

Pictures *	Type	General description *
	MMA-MB/R	<p>    </p> <p> $V = 700 - 250.000 \text{ m}^3/\text{h}$ $P = 700 - 7.500 \text{ Pa}$ Medium pressure centrifugal fan. High efficiency reverse-blade impeller. Belt-driven. Use : for dusty air with small size granular material Temperature max : +300°C. Option : ATEX construction, stainless steel fan </p>
	MMA-MC/R	<p>    </p> <p> $V = 700 - 9.000 \text{ m}^3/\text{h}$ $P = 1.400 - 10.000 \text{ Pa}$ Medium pressure centrifugal fan. High efficiency reverse-blade impeller. Belt-driven. Use : for very dusty air with small size material suspended in the air Temperature max : +300°C. Option : ATEX construction, stainless steel fan </p>
	MMA-MD/R	<p>    </p> <p> $V = 2.000 - 200.000 \text{ m}^3/\text{h}$ $P = 1.500 - 10.000 \text{ Pa}$ Medium pressure centrifugal fan. High efficiency reverse-blade impeller. Belt-driven. Use : for very dusty air with small size material suspended in the air Temperature max : +300°C. Option : ATEX construction, stainless steel fan </p>
	MMA-AB/R	<p>    </p> <p> $V = 1.000 - 40.000 \text{ m}^3/\text{h}$ $P = 1.000 - 20.000 \text{ Pa}$ High pressure centrifugal fan. High efficiency reverse-blade impeller. Belt-driven. Use : for clean or dusty air Temperature max : +300°C. Option : ATEX construction, stainless steel fan </p>

Pictures *	Type	General description *
	MMA-AE/R	   $V = 100 - 1.800 \text{ m}^3/\text{h}$ $P = 1.600 - 17.000 \text{ Pa}$ High pressure centrifugal fan. High efficiency reverse-blade impeller. Belt-driven. Use : for clean or dusty air Temperature max : +300°C. Option : ATEX construction, stainless steel fan
	MMA-AF/R	   $V = 500 - 8.000 \text{ m}^3/\text{h}$ $P = 2.000 - 17.000 \text{ Pa}$ High pressure centrifugal fan. High efficiency reverse-blade impeller. Belt-driven. Use : for clean or dusty air Temperature max : +300°C. Option : ATEX construction, stainless steel fan
	MMA-TA/R	   $V = 300 - 14.000 \text{ m}^3/\text{h}$ $P = 1.500 - 10.000 \text{ Pa}$ Open blade and single inlet centrifugal fan. Belt-driven. Use : for very dusty and with material suspended in the air Temperature max : +300°C. Option : ATEX construction, stainless steel fan
	MMA-TB/R	   $V = 400 - 10.000 \text{ m}^3/\text{h}$ $P = 500 - 8.500 \text{ Pa}$ Open blade and single inlet centrifugal fan. Belt-driven. Use : for very dusty and with material suspended in the air Temperature max : +300°C. Option : ATEX construction, stainless steel fan

Pictures *	Type	General description *
	MMA-TC/R	<div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div> <p>V = 400 – 10.000 m³/h P = 500 – 8.500 Pa</p> <p>Open blade and single inlet centrifugal fan. Belt-driven.</p> <p>Use : for very dusty and with material suspended in the air</p> <p>Temperature max : +300°C.</p> <p>Option : ATEX construction, stainless steel fan</p> </div> <div style="text-align: right;">    </div> </div>

* The above pictures and descriptions are not contractual and not exhaustive.

3. Ducted axial fans







Picture *	Type	General description *
	MDY-CCZ	<p>V = 1.100 / 11.500 m³/h P = max 150 Pa High efficiency compact ducted axial fan. Diameter from 310 to 560 mm. External rotor motor speed controllable. High efficiency aerofoil profiled impellers. Temperature max : +60°C.</p>
	MDY-CCP	<p>Portable ducted axial fan. Can be easily moved and set in the most suitable position and orientation. Diameter from 355 to 635 mm. Directly coupled motor. Use: where powerful air throws are necessary: e.g. to cool people, to create scenic effects,... Clean air. Temperature max : 50°C.</p>
	MDY-CC	<p>V = 1.200 - 140.000 m³/h P = max 750 Pa Short casing ducted axial fan with plastic impeller. Diameter from 310 to 1.600 mm. Directly coupled motor. Use: large airflow of clean air with relatively low pressure drop Temperature max : +50°C. On request : ATEX version, « HT » version (F400)</p>
	MMA-MVHGT	<p>V = 5.000 – 220.000 m³/h P = 0 - 1.200 Pa Short cased axial fan with aluminium impeller. Directly coupled motor. Diameter : 1.250 - 1.600 mm. Temperature max : +50°C On request : ATEX version, 100% reversible impeller.</p>

Picture *	Type	General description *
	MMA-MVHGTX	<p>V = 5.000 – 220.000 m³/h P = 0 - 1.200 Pa Short cased axial fan with aluminium impeller. Belt-driven with motor outside the air flow. Diameter : 1.250 - 1.600 mm. Temperature max : +120°C On request : ATEX version, 100% reversible impeller.</p> 
	MMA-MVHCT	<p>V = 1.000 – 70.000 m³/h P = 0 - 800 Pa Long cased axial fan with external terminal box. Plastic or aluminium impeller. Direct driven. Diameter : 355 - 1.000 mm. Temperature max : +50°C On request : ATEX version, 100% reversible impeller.</p> 
	MMA-MVHPX	<p>V = 1.000 – 68.000 m³/h P = 0 - 800 Pa Belt-driven tubular axial fan with casing aperture up to 180°. Cast aluminium impeller. Temperature max : +120°C On request : ATEX version, 100% reversible impeller.</p> 
	MDY-TA-HP	<p>V = 2.000 - 250.000 m³/h P = upon request Large 'High Performances' ducted axial fan with long casing. Diameter from 1.120 to 1.600 mm. Directly coupled motor. Use: large airflow with relatively low pressure drop. Clean air. Temperature max : +70°C On request : « HT » version (400°C/2H)</p> 



Picture *	Type	General description *
	MMA-MVHTP	<p>V = 5.000 – 160.000 m³/h P = 0 – 1.800 Pa</p> <p>High pressure cased axial fan. Long casing and high performance cast aluminium impeller.</p> <p>Use : for mining installations or in applications with large load losses.</p> <p>Temperature max : +70°C.</p> <p>On request : ATEX version, stainless steel fan, hot dip galvanised steel.</p>
	MMA-MVHBA	<p>V = 1.000 – 22.000 m³/h P = 0 – 750 Pa</p> <p>Bifurcated tubular fan with motor outside the air flow.</p> <p>Temperature max : +150 °C continuous (peak +200 °C).</p> <p>On request : stainless steel casing.</p>
	MDY-CCB	<p>V = 4.000 / 48.000 m³/h P = max 750 Pa</p> <p>Bifurcated ducted axial fan in AISI304 or steel with epoxy painting. Diameter from 505 to 1.010 mm. Directly coupled motor out of the air flow.</p> <p>Use: hot smoke, fumes and vapors, high humidity and/or saturated by grease, oil or particles. For professional kitchen, painting booths, furnaces, foundries, cooling/evaporative tower,...</p> <p>Temperature max : +200°C</p>
	MVE-P-AX	<p>V = 3.000 – 35.000 m³/h P : max 500 Pa</p> <p>Bifurcated ducted axial fan in plastic material. Motor outside the air flow.</p> <p>Diameter from 400 up to 800 mm, directly coupled motor.</p> <p>Use: sucking of corrosive air and vapors</p> <p>Temperature max : +60°C.</p>

* The above pictures and descriptions are not contractual and not exhaustive.

4. Plate-mounted fans

Picture *	Type	General description *
	MDY-QCS	<p>V = 250 / 1.900 m³/h P = max 30 Pa Small plate mounted axial fan. Diameter from 215 to 365 mm. Directly coupled motor. Use: ventilation in residential, commercial and industrial buildings and premises. Clean air. Temperature max: +40°C.</p>
	MDY-QCM	<p>V = 500 – 5.500 m³/h P = max 80 Pa Plate mounted axial fan. Diameter from 215 to 410 mm. Directly coupled motor. For ventilation in residential, commercial and industrial buildings and premises. Temperature max : +50°C. On request : ATEX version</p> 
	MDY-QCL	<p>V = 500 / 12.700 m³/h P = max 180 Pa Plate mounted axial fan. Diameter from 215 to 710 mm. Speed adjustable directly coupled motor. Use: ventilation in residential, commercial and industrial buildings and premises. Clean air. Temperature max: +60°C.</p>
	MFI-AW (EC)	<p>V = 0 – 17.000 m³/h P = max 150 Pa Axial wall fan, with round or square wall frame. Direct driven. Motor IP65, 100% stepless, low sound. NEW : EC motor Diameter from 315 up to 630 mm. Use : halls, heaters, drying rooms, agriculture,...</p> 

Picture *	Type	General description *
	MAV-VPH P	<p>V = 200 / 20.000 m³/h P = max 300 Pa</p> <p>Plastic spiral fan, for wall application, wall plate in PP, blades in reinforced PP, PP or aluminium hub coat, grid in stainless steel. Diameter from 250 to 700 mm.</p> <p>Use : transport of corrosive air, vapors, fumes,...</p> 
	MDY-ZOO	<p>V = 10.000 / 40.000 m³/h</p> <p>Ring axial fan. Diameter from 660 to 1.270 mm. Belt driven.</p> <p>Use : to exhaust high moisture and corrosive vapors in greenhouses, farm sheds, car washes, creameries and tanneries.</p> <p>Temperature max : +40°C.</p> 
	MEV-WA 1400	<p>V = max 42.000 m³/h P :max 130 Pa</p> <p>Axial wall fan diameter 1.400 mm. With EC brushless motor IP65, impeller with 4 plastic blades.</p> <p>Use : agriculture, engine rooms, production premises, silos, storage rooms,...</p> 
	MMA-MVHCH	<p>V = 1.000 - 70.000 m³/h P = 0 – 800 Pa P :max 130 Pa</p> <p>Wall mounted axial fan. Direct driven. Impeller in plastic material or aluminium. Diameter : 355 - 1.000 mm.</p> <p>Temperature max : +50°C.</p> <p>On request : ATEX version, 100% reversible impeller.</p> 







Picture *	Type	General description *
	MDY-AC/A	<p>V = 1.500 / 75.000 m³/h P = max 850 Pa Ring axial fan. Diameter from 1.120 to 1.250 mm. Directly coupled motor. Use: residential and industrial buildings in which relevant air deliveries without canalization are requested. Clean air. Temperature max: +50°C.</p>
	MDY-AC/B	<p>V = 1.500 / 75.000 m³/h P = max 850 Pa Double flanged ring axial fan. Diameter from 300 to 1.250 mm. Directly coupled motor. Use: residential and industrial buildings in which relevant air deliveries without canalization are requested. Clean air. Temperature max: +50°</p>

* The above pictures and descriptions are not contractual and not exhaustive.

5. Roof fans




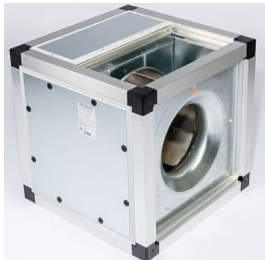
Pictures *	Type	General description *
	MDY-REA MDY-REV	V = 150 - 5.500 m ³ /h P = 0 - 420 Pa Compact centrifugal roof fan with external rotor motor. Diameter from 200 to 400 mm. Temperature max : +60°C. On request : with vertical discharge (type 'V')
	MDY-FCP (V)	V = 1.000 - 30.000 m ³ /h P = 0 - 800 Pa High performance centrifugal roof extractor. With high yield backward curved wheel, from 350 to 900 mm. Directly coupled motor. Use: for direct or ducted ventilation in residential, commercial and industrial buildings. Temperature max : 80°C. On request : with outer deflector for vertical discharge (type 'V'), ATEX version 
	MDY-FC-AT	V = 1.000 - 30.000 m ³ /h P = 0 - 750 Pa High temperature centrifugal roof extractor. Diameter from 350 to 800 mm. Directly coupled motor. Single or double-speed motor. Temperature max : +200°C On request : HT (up to +400°C/2H) 
	MDY-TACC	V = 2.000 - 45.000 m ³ /h P = 0 - 450 Pa Compact axial roof fan for extracting large air volumes. High strength, easy installation, high efficiency. Diameter from 450 to 970 mm. Directly coupled motor. Use: air exchange of large volume premises and plants. Clean air. Temperature max : +50°C.

Pictures *	Type	General description *
	MDY-TAV	<p>Performances on request (min. 8.000 m³/h). Vertical discharge axial roof fan (better efficiency and faster dispersion of the air). Diameter from 800 to 1.400 mm. Directly coupled motor.</p> <p>Use : to extract large air volumes, for direct or ducted ventilation. Clean air.</p> <p>Temperature max : +50°C.</p>
	MFI-TYP 40 (EC)	<p>V = 0 / 3.800 m³/h P = max 600 Pa</p> <p>Roof top unit « flat serie » with horizontal discharge, disc-rotor motor, 100% controllable, IP65, low sound level ; 3 sizes.</p> <p>NEW : with EC motor.</p> <p>Use : residential building, business premises, offices and industry buildings.</p> <p>Temperature max : +60°C.</p> 
	MFI-TYP 41 (EC)	<p>V = 0 / 30.000 m³/h P = max 1.400 Pa</p> <p>Roof top unit with horizontal discharge, with housing, disc-rotor motor, 100% controllable, IP65, low sound level. Weather shelter and outlet dome. 4 sizes.</p> <p>NEW : with EC motor.</p> <p>Temperature max : +80°C.</p> 
	MFI-TYP 42 (EC)	<p>V = 0 / 8.000 m³/h P = max 700 Pa</p> <p>Roof top unit « flat serie » with horizontal discharge, disc-rotor motor, 100% controllable, IP65, low sound level. With backward curved blades impeller. Available in 6 sizes.</p> <p>NEW : with EC motor.</p> <p>Temperature max : 60°C.</p> 
	MVE-TCO	<p>V = 300 - 10.000 m³/h P = 100 - 1.100 Pa</p> <p>Roof fan for corrosive fluids completely made of plastic materials (PP). Backward-bladed impeller.</p> <p>Use : extraction of corrosive smoke and vapors.</p> <p>Temperature max : 60°C.</p> <p>On request : ATEX construction</p>  

Pictures *	Type	General description *
	MVE-P-CO	<p>V = 200 - 10.000 m³/h P = 50 – 2.000 Pa Roof centrifugal fan for corrosive fluids completely made of plastic materials (PE/PP). Backward-bladed impeller. Use : extraction of corrosive smoke and vapors. Temperature max : +60°C On request : ATEX construction</p>  
	MVE-TCV	<p>V = 150 / 57.000 m³/h P = max 5.600 Pa Roof fan for corrosive fluids completely made of plastic materials, with vertical outlet Use : extraction of corrosive smoke and vapors. Temperature max : 60°C. On request : ATEX</p>  

* The above pictures and descriptions are not contractual and not exhaustive.

6. Box fans and Air Handling Units

Picture *	Type	General description *
	MFI-Air Handling Unit (EC)	<p>‘Extra flat’ range : max. 9.000 m³/h ‘Standard’ range : max. 60.000 m³/h</p>  <p>Air handling unit (AHU) upon request, including fan, heating and cooling batteries, filters (flat, bag, carbon media,...). Available with EC motor. Use : all HVAC use</p>
	MFI-EASY-BOX FEB (EC)	<p>V = 0 - 8.000 m³/h P = 0 - 680 Pa</p>  <p>Compact box fan, single inlet, with external disc rotor motor IP65, 100% controllable. Backward curved high performance impeller. Best quality for a low price. Available with EC motor. Temperature max : +100°C.</p>
	MFI-VN (EC)	<p>V = 0 - 33.000 m³/h P = 0 - 1.500 Pa</p>  <p>Compact fan unit, double inlet, forward curved impeller, with disc-motor rotor, 100% controllable, IP65, low sound level. Available with EC motor. Temperature max : 80°C.</p>
	MFI-VF (EC)	<p>V = 0 - 9.000 m³/h P = 0 - 980 Pa</p>  <p>‘Super flat’ compact fan unit, single inlet, forward curved impeller, with disc-motor rotor, 100% controllable, IP65, low sound level. Available with EC motor. Use : industries, buildings, HVAC,... Clean air. Temperature max : 80°C.</p>
	MFI-FMB (EC)	<p>V = 0 - 14.700 m³/h P = 0 - 940 Pa</p>  <p>Fan unit with free-wheeling backward curved impeller, high efficiency, double panels, with disc-motor rotor, 100% controllable, IP65, low sound level. Available with EC motor. Temperature max : 70°C.</p>

Picture *	Type	General description *
	MFI-FMBT (EC)	<p>V = 0 – 15.000 m³/h P = 0 - 1.100 Pa</p> <p>Fan unit with free-wheeling backward curved impeller, high efficiency, double panels, with disc-motor rotor, 100% controllable, IP65, low sound level.</p> <p>Available with EC motor.</p> <p>Temperature max : +100°C continuous.</p>
	MDY-S-CUBE-KAT	<p>V = 100 – 12.000 m³/h P = 0 - 600 Pa</p> <p>Backward curve centrifugal box fans with double skin, for high temperature.</p> <p>Motor external to the stream.</p> <p>Use : for industrial kitchens, for clean or dusty air with grease or combustion residuals.</p> <p>Temperature max : +180°C continuous</p>
	MDY-BOX-T <i>NEW</i>	<p>V = 1.00 - 30.000 m³/h P = max 700 Pa</p> <p>Belt driven double inlet box fan, low noise level.</p> <p>Use : for urban premises and industrial sites where the noise is a problem. Clean air.</p> <p>Temperature max : 50°C.</p> <p>Option : ATEX 3G, filtering section, double skin panel,...</p>
	MSO-CVAB ATX	<p>V = 0 / 14.000 m³/h P = max 1.000 Pa</p> <p>Box fan, impeller with backward curved blades.</p> <p>ATEX construction gaz II2G Ex d IIB (+H2) T4 or II2G Ex e II T3.</p> <p>Air from -20°C to +40°C.</p>
	MDY-MINI-BOX	<p>V = 25 / 1.100 m³/h P = max 500 Pa</p> <p>Slim-line acoustic boxed fan, with round spigot (diameter from 100 to 315 mm).</p> <p>Use: ideal for false ceiling installation in houses, offices, public premises,... Clean air.</p> <p>Temperature max : 60°C.</p>

* The above pictures and descriptions are not contractual and not exhaustive.

7. HVAC centrifugal fans

Pictures *	Type	General description *
	MFI_Fan Grid <i>NEW</i>	V = 0 – 20.000 m ³ /h P = 0 - 500 Pa Solution with several high efficiency plug fans (backward curved blades, EC motor) in a structure. Used for various applications, such as in ventilation systems with high volume flows or in the retrofit business.
	MFI-D (EC) MFI-DS (EC)	V = 0 – 24.000 m ³ /h P = 0 - 1.500 Pa Compact fan <u>double</u> inlet with internal disc-rotor motor, 100% adjustable voltage, IP65, low sound level. Available with EC motor. Use : HVAC, filtration, heating. Clean air. Temperature max : +80°C.
	MFI-CE (EC)	V = 0 - 7.000 m ³ /h P = 0 - 1.100 Pa Compact fan <u>single</u> inlet with internal disc-rotor motor, 100% adjustable voltage, IP65, low sound level. Available with EC motor. Use : HVAC, filtration, heating. Clean air. Temperature max : +80°C.
	MFI-CFE (EC)	V = 0 / 5.300 m ³ /h P = 0 - 1.100 Pa <u>Super flat</u> fan single inlet with internal disc-rotor motor, 100% adjustable voltage, IP65, low sound level. Available with EC motor. Use : HVAC, filtration, heating. Clean air. Temperature max : +80°C.

Pictures *	Type	General description *
	MFI-CEK (EC)	  $V = 0 - 4.000 \text{ m}^3/\text{h}$ $P = 0 - 600 \text{ Pa}$ Compact single inlet fan, with internal disc-rotor motor, 100% adjustable voltage, IP65. Available with EC motor. Use : in industrial kitchens. Temperature max : +100°C continuous.
	MFI-HE / HD (EC)	 $V = 0 - 20.000 \text{ m}^3/\text{h}$ $P = 0 - 1.700 \text{ Pa}$ High efficiency single (HE) or double inlet fan (HD) with backward curved impeller with disc-motor rotor, 100% controllable, IP65, low sound. NEW : available with EC motor Use : air conditioning, clean room, industrial kitchens, industry, engine building. Clean air. Temperature max : +70°C.
	MRE- DA-NT	$V = 500 - 70.000 \text{ m}^3/\text{h}$ $P = 0 - 950 \text{ Pa}$ Double inlet centrifugal fan without motor. Size from 7/7 to 30/28. Use : ventilation, air conditioning, filtration, heating. Clean air. Temperature max : +85°C. Options : RTC (with structure) and RTCE (with reinforced bearings)
	MRE- DAP-NT	Double inlet centrifugal fan, with support frame and motor (multiple executions on request). Size from 7/7 to 30/28. Use : ventilation, air conditioning, filtration, heating. Clean air. Temperature max : +85°C. Options : RTC (with structure) and RTCE (with reinforced bearings)

* The above pictures and descriptions are not contractual and not exhaustive.

8. « Plug » fans

Pictures *	Type	General description *
	MFI-FLR (EC)	<p>V = 0 - 15.000 m³/h P = 0 - 950 Pa</p> <p>Free-wheeling impeller, AISI or aluminium, with disc-motor rotor, 100% controllable, IP65, low sound, high economy. Available with EC motor. Use : air conditioners, clean rooms filter units, 'RLT'-arrangements Température max : +70°C.</p> 
	MFI-FLRE (EC)	<p>V = 0 - 15.000 m³/h P = 0 - 900 Pa</p> <p>Freewheeling impeller / Plug fan, with backwards curved impeller and with disc-motor rotor, 100% controllable, IP65, low sound, high economy. Easy mounting and maintenance. Available with EC motor. Temperature max : +70°C.</p> 
	MVI-MF2	<p>V = 1.000 - 75.000 m³/h P = 0 - 3.300 Pa</p> <p>Centrifugal 'plug' fan, direct driven, with own rigid structure unit. Accessories. Use : to be mounted in air handling units Temperature max : +40°C. Option : in stainless steel</p>
	MVI-MF3	<p>V = 1.000 - 75.000 m³/h P = 0 - 3.300 Pa</p> <p>Radial 'plug-in' fan, direct driven, with own rigid structure unit. With back-curved impellers diameter range from 220 up to 1.120 mm. Temperature max : +40°C Option : in stainless steel</p>

* The above pictures and descriptions are not contractual and not exhaustive.





9. In-line » fans



Picture *	Type	General description *
	MDY-AXC/ LINE- METAL	<p>V = 30 - 2.300 m³/h P = 0 - 900 Pa Round duct centrifugal in-line fan. Low noise. Limited dimensions. Easy to install. Use: to be installed in any point along the duct or at the duct ends. Clean air. Temperature max : +60°C.</p>
	MDY-AXC- EC <i>NEW</i>	<p>V = 0 – 1.300 m³/h P = 0 - 650 Pa Round duct centrifugal in-line fan with EC motor. Low noise. Limited dimensions. Easy to install. Use: to be installed in any point along the duct or at the duct ends. Clean air. Temperature max : +60°C.</p> 
	MMA- MVHBA	<p>V = 1.000 - 22.000 m³/h P = 0 – 750 Pa Bifurcated tubular axial fan with motor outside the air flow. Use : for hot air extraction, fumes and vapors, fluids with high humidity and/or saturated by grease oil or particles. Temperature max : +150°C (peak +200°C) On request : stainless steel</p>  
	MDY-AxB	<p>V = 100 - 6.500 m³/h P = 0 - 680 Pa Rectangular ducted centrifugal in-line fan. Directly coupled motor. Use : for practical and quick installation into rectangular section ducted systems. Clean air. Temperature max : +50°C.</p>

Picture *	Type	General description *
	MDY-DPK-EC <i>NEW</i>	V = 0 - 12.000 m ³ /h P = 0 - 900 Pa Centrifugal in-line fan suitable for rectangular ducting installation, provided with high efficiency EC motor. With backwards curved blades impeller, directly coupled to EC motor. Compact and easy to install. Temperature max : +50°C.
	MDY-MINI-BOX	V = 25 - 1.100 m ³ /h P = 0 - 500 Pa Slim-line acoustic boxed fan, with round spigot (diameter from 100 to 315 mm). Directly coupled motor. Use: ideal for false ceiling installation in houses, offices, public premises,... Clean air. Temperature max : +60°C.
	MDY-ESR-EC <i>NEW</i>	V = 0 - 2.000 m ³ /h P = 0 - 1.000 Pa In-line super-silenced boxed fan, provided with highly efficient EC motor. Compact and easy to install. With inlet and outlet side connection socket for direct installation in duct. Temperature max : +50°C.
	MDY-AXR <i>NEW</i>	V = 0 - 420 m ³ /h P = 0 - 300 Pa In-line centrifugal fan for radon mitigation. Tight sealed housing in self-extinguishing technopolymer. Sizes : from 100 to 160 mm.

* The above pictures and descriptions are not contractual and not exhaustive.

10. Heat-recovery fans

Picture *	Type	General description *
	MDY- REC PRO 75	<p>V = 450 - 4.300 m³/h P = 0 - 900 Pa</p> <p>Heat recovery unit with minimum 75% thermal efficiency. Comply with ErP Directive 125/2009/CE and EU regulation 1253/2014. Available in 6 sizes, airflow from 450 to max 4.300 m³/h</p>
	MDY- REC PRO 80R	<p>V = 5.700 – 23.500 m³/h P = 0 - 1.500 Pa</p> <p>Heat recovery unit with enthalpy rotor with minimum 80% thermal efficiency. Comply with ErP Directive 125/2009/CE and EU regulation 1253/2014. Available in 4 sizes, airflow from 5.700 up to 23.500 m³/h.</p>
	MDY- REC PRO 90	<p>V = 450 - 4.100 m³/h P = 0 - 900 Pa</p> <p>Heat recovery unit with minimum 90% thermal efficiency. Comply with ErP Directive 125/2009/CE and EU regulation 1253/2014. Available in 6 sizes, airflow from 450 to max 4.100 m³/h</p>
	MDY- REC PRO 90S	<p>V = 4.800 – 23.500 m³/h P = 0 - 1.500 Pa</p> <p>Heat recovery unit with minimum 90% thermal efficiency. Comply with ErP Directive 125/2009/CE and EU regulation 1253/2014. Available in 4 sizes, airflow from 4.800 to max 23.500 m³/h.</p>

Picture *	Type	General description *
	MFI-MINI	 <p> $V = 400 - 800 \text{ m}^3/\text{h}$ $P = 0 - 400 \text{ Pa}$ Heat recovery unit with up to 90% thermal efficiency. Compact model : 365 mm high. With internal disc-rotor motor, 100% adjustable voltage, IP65, AC or EC. Various options : heater, cooling, 'by-pass', anti-freeze protection,... Temperature max : +60°C </p>

* The above pictures and descriptions are not contractual and not exhaustive.

9.2. Fans for industrial process :



Fans for explosive atmosphere (ATEX)

Page 44



Fans for corrosive environments

Page 49



Fans for industrial ovens

Page 55




Oven circulators

Page 57



"High temperature" fans

Page 58

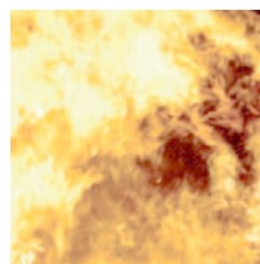

Smoke extract fans

Page 59

1. Industrial fans for explosive atmosphere - ATEX

The word ATEX is obtained from the fusion of the French wording “**AT**mosphères **E**xplosives”. This Directive harmonizes the standards of the European Community members about the electro/mechanicals machinery to be used in potentially explosive environment such as underground pits, petrochemical industries, painting booths, power plants, woodworking plants, breeding plants, greenhouses,...


Our fans are certified according the new **Directive 2014/34/EU**.

All the ATEX fans from MARELLI are labeled



and are delivered with the corresponding certificates (motor and fan).






The end-user or system designer shall classify the hazardous areas as indicated in the European **Directive 1999/92/EC** under its own responsibility and shall communicate these data (category, zone, temperature,...) to the manufacturer in order to produce the appropriate fan.

All the fans that are available in ATEX construction are labelled with  logo in this catalogue. You will find below a selection of them.

Picture *	Type	General description *
	MDY-FC(V)-ATX	<p>V = 200 - 20.000 m³/h P = 0 - 750 Pa</p> <p>Centrifugal roof extractor. Directly coupled motor.</p> <p>Use: for direct or ducted ventilation in potentially explosive environments. Certified according to ATEX 2104/34/EU.</p> <p>Temperature max : +40°C.</p>
	MDY-QCM-ATX	<p>V = 500 – 17.500 m³/h P = 0 - 250 Pa</p> <p>ATEX certified (2014/34/EU) plate mounted axial fan, diameter from 210 up to 710 mm, with directly coupled motor.</p> <p>For ventilation in industrial buildings, laboratories,...</p> <p>Temperature max : +40°C.</p>
	MDY-ERM-EX	<p>V = 30 – 300 m³/h P = 0 - 380 Pa</p> <p>Increased safety mixed flow fan ATEX execution EEx-e IIB T3.</p> <p>Use: battery rooms, dyeing plants, garages,...</p> <p>Temperature max : +50°C.</p>
	MDY-CC-ATX	<p>V = 1.200 – 140.000 m³/h P = 0 - 750 Pa</p> <p>Short casing ducted axial fan with plastic impeller. Diameter from 310 to 1.600 mm. Directly coupled motor.</p> <p>Certified ATEX according to Directive 2014/34/EU.</p> <p>Temperature max : +40°C.</p>
	MMA-MVHCT-ATX	<p>V = 1.000 – 70.000 m³/h P = 0 - 800 Pa</p> <p>Long cased axial fan with external terminal box. Direct driven. Certified ATEX according to Directive 2014/34/EU. Impeller in plastic material or aluminium. Diameter : 355 - 1.000 mm. Temperature max : +50°C.</p> <p>On request : 100% reversible impeller.</p>

Picture *	Type	General description *
	MMA-MVHGTX-ATX	<p>V = 5.000 – 220.000 m³/h P = 0 – 1.200 Pa</p> <p>Short cased axial fan with aluminium impeller. Belt-driven, with motor outside the airflow. Certified ATEX according to Directive 2014/34/EU. Diameter : 1.250 - 1.600 mm. Temperature max : +120°C On request : 100% reversible impeller.</p>
	MDY-DIX(INOX)-ATX	<p>V = 50 – 2.750 m³/h P = 0 - 1.100 Pa</p> <p>Small size forward curved blade centrifugal fan. Directly coupled motor. Certified ATEX according to Directive 2014/34/EU. Temperature max : +40°C. On request : version in stainless steel</p>
	MDY-AL-ATX	<p>V = 200 – 12.000 m³/h P = 0 - 1.600 Pa</p> <p>Forward curved blade centrifugal fan (diameter from 200 up to 450 mm). Execution 4. For operations in potentially explosive environments. Certified ATEX according to Directive 2014/34/EU. Temperature max : +40°C.</p>
	MMA-MVCMT-ATX	<p>V = 0 – 130.000 Pa P = 0 – 4.000 Pa</p> <p>Medium pressure centrifugal fan, with straight blade impeller. Certified according to ATEX 2014/34/EU. Use : for transporting dust and solids Temperature max : +120°C On request : version +250°C.</p>

Picture *	Type	General description *
	MMA-BC-ATX	   V = 600 – 35.000 Pa P = 200 - 4.000 Pa Low pressure centrifugal fan. High efficiency reverse-blade impeller. ATEX certified 2014/34/EU. Directly coupled motor. Use : for clean and slightly dusty air Temperature max : +90°C On request : version +150°C / +300°C, stainless steel fan
	MMA-MD-ATX	   V = 2.000 – 200.000 Pa P = 1.500 – 10.000 Pa Medium pressure centrifugal fan. High efficiency reverse-blade impeller. Certified ATEX (Directive 2014/34/EU). Directly coupled motor. Use : very dusty air and with small size material suspended in the air Temperature max : +90°C On request : version +150°C / +300°C, stainless steel fan
	MMA-AF-ATX	   V = 500 – 8.000 Pa P = 2.000 - 17.000 Pa High pressure centrifugal fan. High efficiency reverse-blade impeller. Certified ATEX according to Directive 2014/34/EU. Directly coupled motor. Use : for clean or dusty air Temperature max : +90°C On request : version +150°C / +300°C, stainless steel fan
	MMA-TC-ATX	   V = 2.000 – 20.000 Pa P = 500 – 3.500 Pa Open blade centrifugal fan. Certified ATEX according to Directive 2014/34/EU. Directly coupled motor. Use : for very dusty air and with material suspended in the air Temperature max : +90°C On request : version +150°C / +300°C, stainless steel fan

Picture *	Type	General description *
	MDY- BOX-T-ATX	<div style="text-align: right;"></div> V = 1.000 – 32.000 Pa P = 0 - 550 Pa Belt driven double inlet box fan, low noise level. Certified ATEX II3G or II3D (2014/34/EU). Use : clean air Temperature max : +40°C. On request : filtering section, double skin panel,...
	MDY- PR-AC-ATX	<div style="text-align: right;">   </div> V = 125 – 18.000 Pa P = 0 - 1.400 Pa Centrifugal fan in plastic material (PE or PP), low noise, high efficiency. ATEX II3G certified (2014/34/EU). Use : for smoke and corrosive vapors and smokes, high humidity air,... Temperature max : +70°C. On request : other ATEX classifications.

* The above pictures and descriptions are not contractual and not exhaustive.

2. Fans for corrosive environments







Picture *	Type	General description *
	...- INOX	In addition to the composite and plastic fans described below, most of our fans (centrifugal and axial) are available in stainless steel (AISI 304, 316L, ...or other on request). To find these fans on this catalogue, you can look for the fan with the 'anticorrosion' logo 
	MDY-CCB	  V = 4.000 - 48.000 m ³ /h P = 0 - 750 Pa Bifurcated ducted axial fan in AISI304 or steel with epoxy painting. Diameter from 505 to 1.010 mm. Directly coupled motor out of the air flow. Use: hot smoke, fumes and vapors, high humidity and/or saturated by grease, oil or particles. For professional kitchen, painting booths, furnaces, foundries, cooling/evaporative tower,... Temperature max : +200°C.
	MVE-P-AX	 V = 3.000 – 35.000 m ³ /h P = 0 - 500 Pa Bifurcated ducted axial fan in plastic material. Motor outside the air flow. Diameter from 400 up to 800 mm, directly coupled motor (6 sizes). Use: sucking of corrosive air and vapors Temperature max : +60°C.
	MDY-AXC-TP	 V = 0 – 420 m ³ /h P = 0 - 300 Pa In-line centrifugal fan with backward curved blades. In self-extinguishing plastic material (PP). Diameter 100 to 160 mm. Temperature max : +50°C.

Picture *	Type	General description *
	MHW-PAV	<p>Axial fan with plastic rounded casing. </p> <p>Customized solution with duty point on request. Diameter from 315 to 630 mm, available in several lengths (350 up to 600 mm). Impeller in aluminium, PPG or PAG. Temperature max : +60°C.</p>
	MAV-VPH P	<p></p> <p>V = 200 - 20.000 m³/h P = 0 - 300 Pa Plastic spiral fan, for wall application, wall plate in PP, blades in reinforced PP, PP or aluminium hub coat, grid in stainless steel. Diameter from 250 to 700 mm. Use : transport of corrosive air, vapors, fumes,...</p>
	MDY-DIC-INOX	<p> </p> <p>V = 50 - 2.400 m³/h P = 300 - 1.000 Pa Small size forward curved blade centrifugal fan in AISI304. Impeller diameter from 100 to 180 mm. Directly coupled motor. Use : Clean air and not-dusty air and smokes. Temperature max: +80°C. On request : « AT » version (150°C continuous)</p>
	MDY-PR-AC	<p> </p> <p>V = 125 - 18.000 m³/h P = 0 - 1.400 Pa Centrifugal fan in plastic material (PE or PP), low noise, high efficiency. Use: smoke and corrosive vapors and smokes, high humidity air,.. up to +60°C On request : available in ATEX version and anti-static self-extinguishing PE (PER)</p>
	MVE-PCM	<p> </p> <p>V = 30 / 500 m³/h P = 0 - 400 Pa Small size centrifugal plastic fan, with direct coupling. Use: smoke and corrosive vapors and smokes, high humidity air,.. Temperature max : +60°C. On request : version ATEX</p>

Picture *	Type	General description *
	MVE-PC	<p>V = 50 - 32.000 m³/h P = max 4.000 Pa</p> <p>Centrifugal fan in plastic materials with forward curve impeller, direct coupling, circular or rectangular outlet flange (depending models).</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,..</p> <p>Temperature max : +60°C.</p> <p>On request : version ATEX.</p>
	MVE-PC-T	<p>V = 70 / 2.000 m³/h P = max 930 Pa</p> <p>Centrifugal fan in plastic materials with forward curve impeller in plastic, belt coupling (ex.2).</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,..</p> <p>Temperature max : +60°C.</p> <p>On request : ATEX</p>
	MVE-PA	<p>V = 40 / 2.200 m³/h P = max 1.300 Pa</p> <p>Centrifugal fan in plastic materials with forward curve impeller in stainless steel, direct coupling.</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,..</p> <p>Temperature max : +60°C.</p>
	MVE-P	<p>V = 200 / 10.000 m³/h P = max 2.300 Pa</p> <p>Centrifugal fan in plastic materials with backward curve impeller, direct coupling.</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,..</p> <p>Temperature max : +60°C.</p> <p>On request : version ATEX.</p>





Picture *	Type	General description *
	MVE-PQ	<p>V = 300 - 37.000 m³/h P = max 6.200 Pa</p> <p>Centrifugal fan in plastic materials with backward curve impeller, direct coupling, execution 4 or 5.</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,...</p> <p>Temperature max : +60°C. On request : version ATEX.</p>
	MVE-P-T	<p>V = 200 / 10.000 m³/h P = max 2.000 Pa</p> <p>Centrifugal fan in plastic materials with backward curve impeller, belt coupling, execution 2..</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,...</p> <p>Temperature max : +60°C. On request : version ATEX.</p>
	MVE-PR 45-140	<p>V = 2.000 / 170.000 m³/h P = max 5.600 Pa</p> <p>Centrifugal fan in plastic materials with backward curve impeller in plastic or stainless steel, direct coupling.</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,...</p> <p>Temperature max : +60°C. On request : version ATEX.</p>
	MVE-PR-T 45-140	<p>V = 2.000 - 170.000 m³/h P = max 5.600 Pa</p> <p>Centrifugal fan in plastic materials with backward curve impeller in plastic or stainless steel, belt coupling (ex.2), rectangular outlet flange.</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,...</p> <p>Temperature max : +60°C. On request : version ATEX.</p>

Picture *	Type	General description *
	MVE-PMS	<p>V = 100 - 7.000 m³/h P = max 5.300 Pa</p> <p>High pressure centrifugal fan in plastic materials with backward curve impeller in plastic or stainless steel, direct coupling.</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,...</p> <p>Temperature max : +60°C.</p> <p>On request : version ATEX.</p>
	MVE-PAS	<p>V = 50 - 8.000 m³/h P = max 11.000 Pa</p> <p>High pressure centrifugal fan in plastic materials with backward curve impeller in plastic or stainless steel, direct coupling.</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,...</p> <p>Temperature max : +60°C.</p> <p>On request : version ATEX.</p>
	MVE-PHS	<p>V = 40 / 2.200 m³/h P = max 1.300 Pa</p> <p>High pressure centrifugal fan in plastic materials (PP) with forward curve impeller in stainless steel, direct coupling.</p> <p>Use: smoke and corrosive vapors and smokes, high humidity air,...</p> <p>Temperature max : +60°C.</p> <p>On request : version ATEX.</p>
	MVE-TCO	<p>V = 300 - 10.000 m³/h P = 100 - 1.100 Pa</p> <p>Roof fan for corrosive fluids completely made of plastic materials (PP). Backward-bladed impeller.</p> <p>Use : extraction of corrosive smoke and vapors.</p> <p>Temperature max : +60°C.</p> <p>On request : ATEX construction</p>

Picture *	Type	General description *
	MVE-P-CO	<div style="display: flex; justify-content: flex-end; align-items: center; gap: 10px;">   </div> <p>V = 200 - 10.000 m³/h P = 50 – 2.000 Pa Roof centrifugal fan for corrosive fluids completely made of plastic materials (PE/PP). Backward-bladed impeller. Use : extraction of corrosive smoke and vapors. Temperature max : +60°C. On request : ATEX construction</p>
	MVE-TCV	<div style="display: flex; justify-content: flex-end; align-items: center; gap: 10px;">   </div> <p>V = 150 - 57.000 m³/h P = 0 - 5.600 Pa Roof fan for corrosive fluids completely made of plastic materials, with vertical outlet Use : extraction of corrosive smoke and vapors. Temperature max : +60°C. On request : ATEX</p>

* The above pictures and descriptions are not contractual and not exhaustive.





3. Fans for industrial ovens

Picture *	Type	General description *
	MMA-ECB/M	<p>V = 50 – 2.300 m³/h P = 60 – 500 Pa</p> <p>Centrifugal fan with a vertical air outlet.</p> <p>Use : especially designed for bread and pastry ovens as well as industrial ovens, for hot air and water vapor from extract hoods.</p> <p>Temperature max : +80 °C</p> <p>On request : stainless steel fan.</p>  
	MMA-ECB/0	<p>V = 800 – 2.250 m³/h P = 400 – 500 Pa</p> <p>Centrifugal fan in INOX304 with horizontal outlet.</p> <p>Use : especially designed for bread and pastry ovens and surface treatment ovens, for hot air and water vapor in extraction hoods.</p> <p>Temperature max : +80 °C</p>  
	MMA-BP/F	<p>V = 20 – 600 m³/h P = 50 – 350 Pa</p> <p>Centrifugal fan in INOX304 with horizontal outlet.</p> <p>Use : especially designed for bread and pastry ovens, for hot air and water vapor in extraction hoods.</p> <p>Temperature max : +80 °C</p>  
	MMA-BP/M INOX	<p>V = 20 – 600 m³/h P = 50 – 350 Pa</p> <p>Centrifugal fan in INOX304 with vertical outlet.</p> <p>Use : especially designed for bread and pastry ovens, for hot air and water vapor in extraction hoods.</p> <p>Temperature max : +80 °C</p>  

Picture *	Type	General description *
	MMA-ECB/MGC	<p>V = 1.100 – 2.400 m³/h P = 400 – 500 Pa</p> <p>Centrifugal fan with vertical outlet. Use : especially designed for recirculating hot air in ovens Temperature max : +300 °C On request : stainless steel fan</p>  
	MMA-ECB/Z	<p>V = 50 – 6.000 m³/h P = 200 – 1.000 Pa</p> <p>Centrifugal fan with horizontal outlet. Use : especially designed for extracting hot air from extract hoods Temperature max : +300 °C On request : stainless steel fan</p>  
	MMA-LM/F	<p>V = 500 – 8.000 m³/h P = 300 – 1.200 Pa</p> <p>Centrifugal fan with horizontal outlet. Use : especially designed for extracting hot air from extract hoods Temperature max : +300 °C On request : stainless steel fan</p>  
	MMA-EARU	<p>V = 1.300 – 4.800 m³/h P = 1.000 – 1.800 Pa</p> <p>Centrifugal fan with reverse-blade impeller. Use : for extracting hot air Temperature max : +90 °C On request : stainless steel fan</p>  
	MMA-LM/R	<p>V = 400 – 10.000 m³/h P = 300 – 2.000 Pa</p> <p>Belt-driven centrifugal fan with reverse-blade impeller and cooling impeller on shaft Use : hot air extraction up to +300°C. Temperature max : +300 °C On request : stainless steel fan</p>  

* The above pictures and descriptions are not contractual and not exhaustive.

4. Industrial oven circulators

Pictures *	Type	General description *
	MMA-MVCMRH	<p>V = 2.000 - 50.000 m³/h P = 500 – 3.500 Pa</p> <p>Belt driven fan, with backward curved impeller. With 150 mm mineral fiber insulated box. For horizontal or vertical work.</p> <p>Temperature max : +300°C (on request : +400°C)</p> 
	MMA-MVCMSH	<p>V = 500 - 48.000 m³/h P = 400 – 2.200 Pa</p> <p>Medium pressure centrifugal fan, backward curved impeller. Heat resistant compartment with high density mineral fiber and great thermal and acoustic insulation.</p> <p>Temperature max : +250°C. On request : version in stainless steel</p>  
	MMA-MVCMPH	<p>V = 400 - 28.000 m³/h</p> <p>Medium pressure centrifugal fan, forward curved impeller. Heat resistant compartment with high density mineral fiber and great thermal and acoustic insulation.</p> <p>Temperature max : +250°C. On request : version in stainless steel</p>  

* The above pictures and descriptions are not contractual and not exhaustive.

5. “High temperature” fans

A 'standard' fan can only be used with a maximum temperature of air from +40°C up to +70°C (depending model and type of coupling).


Our range of fans also covers '**high temperature fans**' for hot air **up to +350°C continuous** (depending models - +900°C with our 'heavy-duty' fans – see 9.3. below).

All the fans that are available in 'high temperatures' construction are labelled with



logo in this catalogue.

Some examples :

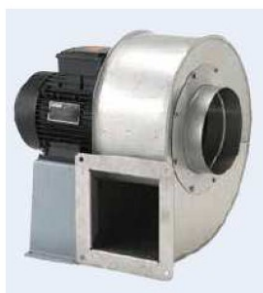


6. Smoke extract fans







These special fans are the answer to problems connected to smoke extraction at high temperature and are the ideal solution for **emergency exhaust in case of fire** (a solution mandatory in fire safety norms of most countries).

Our range of 'HT' fans is CE certified to class **F200, F300/120 or F400** in compliance with EN12101-3 standard by independent and certified laboratories, according to the series and models.



All the fans that are available in 'F400' construction are labelled with  logo in this catalogue. You will find below a selection of them.

Picture *	Type	General description *
	MDY-CC SHT	 <p>V = 2.000 - 79.000 m³/h P = max 500 Pa High efficiency ducted axial fans for high temperature smoke extraction. Diameter from 310 up to 1.000 mm. CE certified F300 or F400 according to EN 12101-3. Temperature max : +70°C continuous</p>
	MDY-TA-HT	 <p>Performances on request <i>High-performance</i> ducted axial fans for high temperature smoke extraction. Diameter from 400 up to 1.600 mm. CE certified F300 or F400 according to EN 12101-3. Temperature max : +70°C continuous</p>

Picture *	Type	General description *
	MDY-FC-HT	<p>V = 500 - 18.000 m³/h P = max 650 Pa Centrifugal roof extractor, wheel with diameter 400 to 800 mm. Directly coupled motor. Use: for direct or ducted extraction of high temperature smoke, certified F400 (according to EN12101-3). Temperature max : +80°C continuous</p> 
	MDY-TC-HT	<p>V = 650 - 20.000 m³/h P = max 800 Pa Centrifugal roof fan suitable for high temperature smoke extraction, with vertical exhaust for optimized safety. Diameter from 350 up to 800 mm. Suitable for running at 150°C continuous and 400°C/2H (F400). Temperature max : +150°C continuous</p> 
	MDY-PR-Q-HT	<p>V = 0 – 8.500 m³/h P = max 900 Pa Backward curved blade centrifugal fan with quadrangular construction. Reduced dimensions thanks to the absence of motor support. CE certified to F400 according to EN12101-3, for high temperature smoke extraction. Temperature max : +100°C continuous</p> 
	MDY-BOX-T HT	<p>V = 500 – 25.000 m³/h P = 100 – 1.500 Pa Belt driven double inlet box fan, with motor outside the airflow. For conveying clean air and non-dusty smoke up to maximum temperature of 200°C continuous or in case of fire emergency at 400°C for 2 hours (F400). Arrangement 9 (motor ≤ 5,5kW) or arrangement 12 (motor > 7,5kW). Temperature max : +200°C continuous</p> 

Picture *	Type	General description *
	MDY-CC-JD HT LP	 <p> $V = 1,28 - 2,69 \text{ m}^3/\text{sec}$ $P = 27 - 69 \text{ N}$ Axial impulse fan, with octogonal shape and extreme compactness. Designed and certified F300/120 (in compliance with EN12101-3) for fire smoke and hot gases extraction. Can be used for normal ventilation (CO extract) with air up to +50°C. Temperature max : +50°C continuous </p>
	MDY-CC-JD HT	 <p> $V = 1,28 - 2,69 \text{ m}^3/\text{sec}$ $P = 27 - 69 \text{ N}$ Axial impulse fan. Designed and certified F300/120 (in compliance with EN12101-3) for fire smoke and hot gases extraction. Can be used for normal ventilation (CO extract) with air up to +50°C. Temperature max : +50°C continuous Options : F400 version, diameter up to 1.000 mm </p>
	MDY-CC-JC HT	 <p> $V = 1,61 - 2,16 \text{ m}^3/\text{sec}$ $P = 50 - 75 \text{ N}$ Centrifugal impulse fan. Designed and certified F300/120 (in compliance with EN12101-3) for fire smoke and hot gases extraction. Can be used for normal ventilation (CO extract) with air up to +50°C. Temperature max : +50°C continuous Upon request : F400 versions </p>

* The above pictures and descriptions are not contractual and not exhaustive.

9.3. 'Heavy-duty' fans :



Axial fans

Page 63



Low pressure fans

Page 654



Medium pressure fans

Page 65



High pressure fans







Page 66



Heavy-duty fans







Page 67

1. Axial fans

Picture *	Type	General description *
	MHD-HDAXM	<p>V = 1.440 – 432.000 m³/h  </p> <p>P : max 3.000 Pa</p> <p>Diameter from 1.120 up to 2.400 mm.</p> <p>Flow rates up to 432.000 m³/h and pressure up to 3.000 Pa with airfoil blades.</p> <p>Axial fans also according to ATEX and API standards.</p> <p>Temperature max : +100°C</p>
	MHD-HDAXH	<p>V = 2.160 – 576.000 m³/h  </p> <p>P : max 2.000 Pa</p> <p>Diameter from 315 up to 2.400 mm.</p> <p>Flow rates up to 576.000 m³/h and pressure up to 2.000 Pa with airfoil blades.</p> <p>Axial fans also according to ATEX and API standards.</p> <p>Temperature max : +100°C</p>

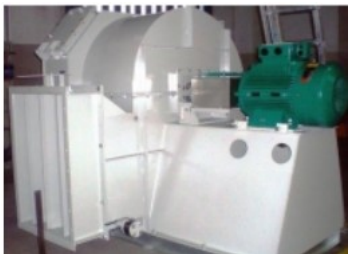


* The above pictures and descriptions are not contractual and not exhaustive.

2. Low pressure fans

Picture *	Type	General description *
	MHD-LPA	<p>V = 5.000 – 140.000 m³/h</p> <p>P : max 4.200 Pa</p> <p>Diameter from 500 up to 1.490 mm.</p> <p>Efficiencies up to 89%. Impeller and casing made of thick carbon steel or inox, fully continuously welded and coated with specific surface paints resistant to industrial environments.</p> <p>Temperature max : +450°C</p>  
	MHD-LPB	<p>V = 5.000 – 160.000 m³/h</p> <p>P : max 4.400 Pa</p> <p>Diameter from 500 up to 1.490 mm.</p> <p>Efficiencies up to 86%. Impeller and casing made of thick carbon steel or inox, fully continuously welded and coated with specific surface paints resistant to industrial environments.</p> <p>Temperature max : +450°C</p>  







* The above pictures and descriptions are not contractual and not exhaustive.

3. Medium pressure fans

Picture *	Type	General description *
	MHD-MP	  <p>P : 8.000 – 20.000 Pa For clean and dusty air fluid up to +450°C. Available also with double inlet design and for higher temperature of the conveyed fluid. Temperature max : +450°C</p>




* The above pictures and descriptions are not contractual and not exhaustive.

4. High pressure fans

Picture *	Type	General description *
	MHD-HPB1	<p>V = 500 – 7.000 m³/h P : max 15.600 Pa Diameter from 400 up to 800 mm. With backward curved impeller blades with efficiencies up to 70%. Clean air or little dusty fluid at max +300°C. Impeller and housing fan are made of carbon steel, fully continuously welded and coated with specific surface paints. Temperature max : +300°C</p>  
	MHD-HPD1	<p>V = 500 – 7.500 m³/h P : max 16.700 Pa Diameter from 400 up to 800 mm. With radial impeller with efficiencies up to 65%. Clean and dusty air at max +300°C. Impeller and housing fan are made of carbon steel, fully continuously welded and coated with specific surface paints. Temperature max : +300°C</p>  


* The above pictures and descriptions are not contractual and not exhaustive.

5. Heavy-duty fans


Picture *	Type	General description *
	MHD- HD	  V : up to 2.000.000 m³/h On demand : heavy duty fans for a vast spectrum of applications with reliable solutions to difficult and unique air moving problems. Knowledge, experience and ability to design a new product solution to meet the requirements. Temperature max : +900°C

* The above pictures and descriptions are not contractual and not exhaustive.

9.4. Blowers :

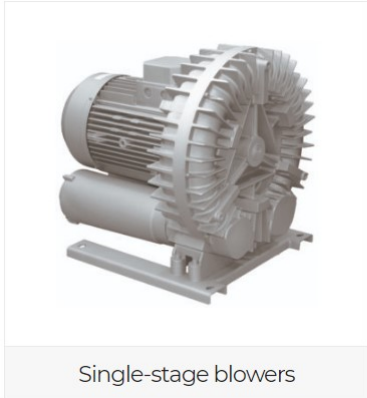
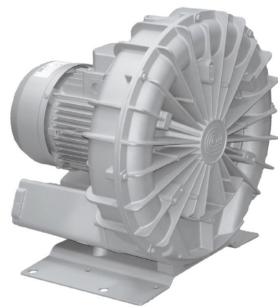


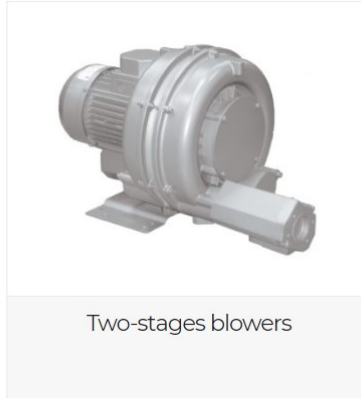



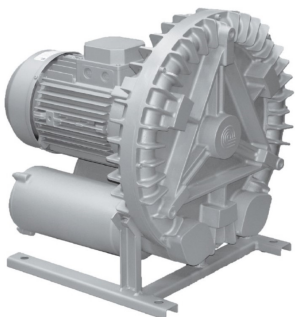
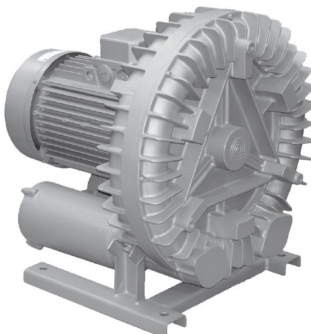
Page 69







Page 72

1. Single-stage blowers





Pictures *	Type	General description *
	MES-FLUXJET	<p>V = max 240 m³/h P = max -255 / +275 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor from 1,1 up to 2,2kW, 230 or 400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries, ... Temperature max : +40°C.</p>
	MES-MEDIOJET	<p>V = max 400 m³/h P = max -325 / +295 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor from 2,2 up to 4kW, 230/400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries, ... Temperature max : +40°C.</p>
	MES-MEDIOJET 350	<p>V = max 440 m³/h P = max -295 / +285 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 4kW, 230/400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries, ... Temperature max : +40°C.</p>
	MES-TECNO JET IIS	<p>V = max 170 m³/h P = max -185 / +185 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 0,75 or 1,1kW, 230 or 400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries, ... Temperature max : +40°C.</p>

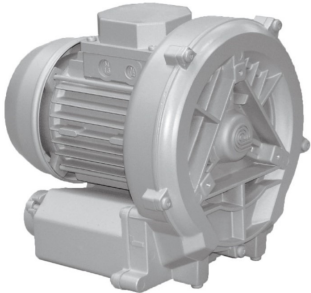
Pictures *	Type	General description *
	MES-UNI-JET 40	<p>V = max 48 m³/h P = max -120 / +130 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 0,2kW, 230 or 230/400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-UNI-JET 75	<p>V = max 100 m³/h P = max -165 / +165 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 0,4kW, 230 or 230//400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-UNI-JET 160	<p>V = max 190 m³/h P = max -440 / +520 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 4kW, 230/400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-UNI-JET 500	<p>V = max 730 m³/h P = max -400 / +465 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor from 7,5 up to 12,5kW, 400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>

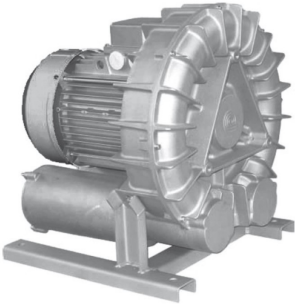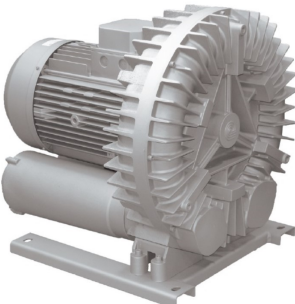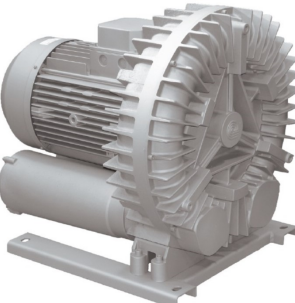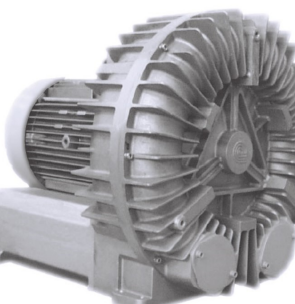Pictures *	Type	General description *
	MES-UNI-JET 501	<p>V = max 600 m³/h P = max -315 / +300 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor from 4 up to 7,5kW, 230/400 or 400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-UNI-JET 1000	<p>V = max 1.480 m³/h P = max -390 / +390 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor from 7,5 up to 20kW, 400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-UNI-JET 1500	<p>V = max 1.800 m³/h P = max -295 / +295 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor from 15 up to 20kW, 400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-UNI-JET 2200	<p>V = max 2.600 m³/h P = max -180 / +130 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 20kW, 400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>

* The above pictures and descriptions are not contractual and not exhaustive.

2. Two-stage blowers

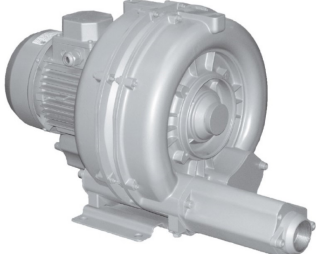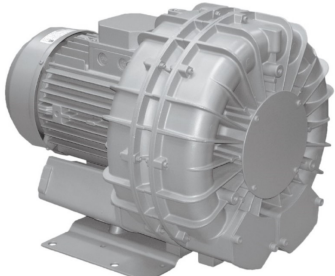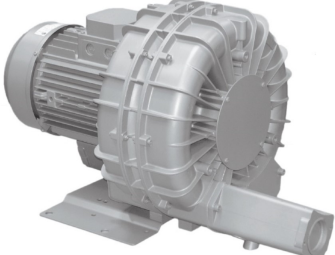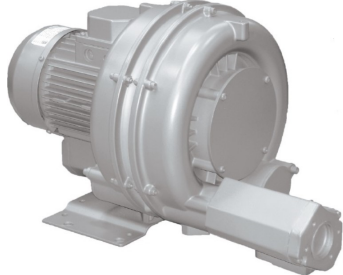Pictures *	Type	General description *
	MES-FLUXJET 2V	<p>V = max 240 m³/h P = max -280 / +265 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 2,2kW, 230/400V, 50/60Hz, IP55 cl.F, cCASus certified.</p> <p>Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-MEDIO 1 AC	<p>V = max 600 m³/h P = max -225 / +215 mBar Side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 4 or 5,5kW, 230/400V, 50/60Hz, IP55 cl.F, cCASus certified.</p> <p>Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-MEDIOJET 2V	<p>V = max 390 m³/h P = max -390 / +440 mBar Double stage side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 4 or 5,5kW, 230/400V, 50/60Hz, IP55 cl.F, cCASus certified.</p> <p>Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>
	MES-TECNOJET 2V	<p>V = max 160 m³/h P = max -295 / +255 mBar Double side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 1,1 or 1,5kW, 230 or 230/400V, 50/60Hz, IP55 cl.F, cCASus certified.</p> <p>Use: dedusting, pneumatic transport, water treatment, cleaning machineries,...</p> <p>Temperature max : +40°C.</p>

Pictures *	Type	General description *
	<p>MES-UNI-JET 75 2V</p>	<p>V = max 100 m³/h P = max -270 / +245 mBar Double side channel blower, strong and compact, maintenance free. Manufactured in die-cast aluminium alloy. Directly coupled to electric motor 0,7 or 0,8kW, 230 or 400V, 50/60Hz, IP55 cl.F, cCASus certified. Use: dedusting, pneumatic transport, water treatment, cleaning machineries,... Temperature max : +40°C.</p>

* The above pictures and descriptions are not contractual and not exhaustive.

9.5. Destratifiers – HVLS :



HVLS destratifiers

Page 75




CROSS destratifiers

Page 75


Working principle :

Destratify means *mix air in order to obtain better temperature distribution* in all studied space, avoiding different temperature zone, too hot or too cold. Through this technology our customer can optimize the functionality of their heating system, saving cost and having a more comfortable environment.

NO HVLS

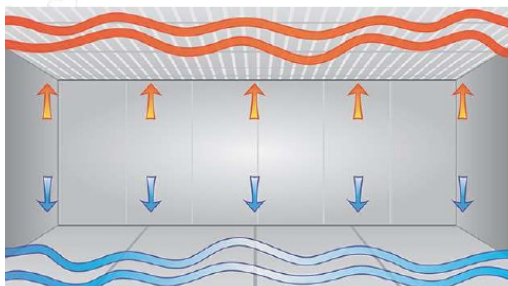

HVLS

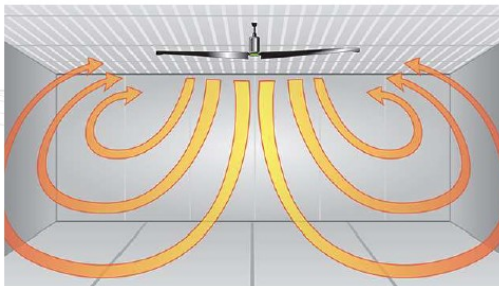







In the winter :

- > 30% heating energy cost reduction
- > prevents creation of condensate on the ground avoiding deterioration of materials and / or machineries



In the summer :

- > energy saving by optimizing the efficiency of the airco system
- > lowered temperature perceived by approximately 4 – 6°C
- > higher productivity of people

1. HVLS destratifiers

Pictures *	Type	General description *
	MEL-WD	 <p>Destratifier type 'HVLS' with diameter from 2,5 to 4 m. Brushless motor with integrated inverter, aluminium impeller. Up to 300.000 m³/h. Use : garage, production premises, silos, storage rooms, factories, warehouses, logistic center, mall, theatre, conference room, fitness and sport center</p>
	MEL-WF	 <p>Destratifier type 'HVLS' with diameter from 2,5 to 4 m. Brushless motor with integrated inverter, aluminium impeller. Up to 330.000 m³/h. Use : garage, production premises, silos, storage rooms, factories, warehouses, logistic center, mall, theatre, conference room, fitness and sport center</p>
	MEL-WZ	 <p>Destratifier type 'HVLS' with diameter from 2,5 to 7 m. Brushless motor with integrated inverter, aluminium impeller. Up to 850.000 m³/h. Use : garage, production premises, silos, storage rooms, factories, warehouses, logistic center, mall, theatre, conference room, fitness and sport center</p>

2. CROSS destratifiers

Pictures *	Type	General description *
	MEL-CROSS	 <p>For combined use with the 'HVLS' destratifiers. Brushless motor with integrated inverter, impeller in aluminium. For flow up to 115.000 m³/h. Use : garage, production premises, silos, storage rooms, factories, warehouses, logistic center</p>

9.6. Axial impellers :



Fixed axial impellers

Page 79



Variable axial impellers

Page 80



Aluminium axial impellers


Page 81



Axial impellers on request

Page 81

Fixed or variable airfoil profile axial impellers

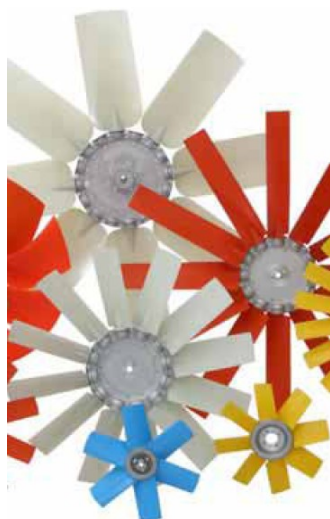

HW has been operating in the ventilation sector for more than 30 years and operates in compliance with ISO 9001 standards since 1997. The product range, thanks to the numerous types (diameters from 200 to 1.270 mm, multiple configurations of blade profiles and setting angles), permits to create customized solutions for all air movement needs.



1. Features and advantages :





- **Wide performance range**
- Possibility of **extremely high rotation speeds** based on the impeller diameter
- **Standard material** : blades PP/PPG/PAG/RYT ; hubs : die cast light aluminium alloy
- Operating **temperatures**: -40° to +120°C ; with special material from -80° to 250°C.
- **Light weight**
- **Low noise level** due to the profile type, the highly polished and non-resoned characteristics of the selected materials
- **Elasticity** together with **high mechanical resistance** guarantees a long life even for the most demanding applications
- **Corrosion proof**: immune to corrosive fumes, salt air,...
- **High abrasion resistance**
- **Accurately manufactured** and easy to assemble: G.6.3. grade electronic balancing
- **Optimal price / quality ratio**
- **Higher operating safety** : particularly suitable for environments with high risk of fire explosion or that are dusty as well as in low temperature environments
- **Ready to deliver** : standard, semi-finished products in stock
- **Flexibility** : able to satisfy customers with small or large orders
- **Special materials and colors** upon request : permanent antistatic ATEX, magnetically shielded, flame-retardant, for cryogenic temperatures
- Research and development

2. Applications :











- Air conditioning
- Ventilation
- Axial fans
- Generator units
- Electric welding machines
- Heat exchangers
- Refrigeration units
- Cooling towers
- Animal farms
- Refrigeration and freezing
- Blowing units
- Agricultural sprayers
- Lift trucks
- Radiators
- Earth moving machines
- Agricultural machines and tractors
- Devices
- Hovercraft
- Snow canons

1. Fixed axial impellers

Picture *	Type	General description *
	MHA-TS	 Duty point on request . Fixed airfoil profile axial impellers. Diameter from 230 to 900 mm. Blades available in plastics, aluminum and ATEX materials. Working temperature from -50°C up to +200°C.
	MHA-Q	 Duty point on request . Fixed pitch sickle profile axial impellers with low noise level . Diameter from 230 to 750 mm. Blades available in plastics, and ATEX materials. Working temperature from -50°C up to +200°C.





* The above pictures and descriptions are not contractual and not exhaustive.

2. Variable axial impellers

Picture *	Type	General description *
	MHW-A	<p>Duty point on request.  </p> <p>Axial impellers with variable airfoil profile blade, up to 1.530 mm diameter. Light aluminium alloy hub. With blades in PPG, PAG, RYT, PAA, PAX or PAM material. For temperatures from -20°C up to +120°C. ATEX version available.</p>
	MHA-TM	<p>Duty point on request.  </p> <p>Variable pitch airfoil profile axial impellers. Diameter from 300 to 1.270 mm. Blades available in plastics, aluminum and ATEX materials. Working temperature from -50°C up to +200°C.</p>
	MHA-SR	<p>Duty point on request. </p> <p>Silent sickle profile axial impellers for low noise emissions. Diameter from 550 to 1.100 mm. Blades available in plastics materials. Working temperature from -40°C up to +120°C.</p>




* The above pictures and descriptions are not contractual and not exhaustive.

3. Aluminium axial impellers


Picture *	Type	General description *
	MHA-C-ALU	 <p>Duty point on request. Aluminum sickle profile axial impellers for high temperature and corrosive environments. Diameter from 450 to 1.280 mm. Blades in aluminum. Working temperature from -80°C up to +250°C.</p>
	MHA-R	 <p>Duty point on request. Reversible airfoil profile axial impellers for low noise emissions. Diameter from 550 to 966 mm. Blades available in aluminum. Working temperature from -80°C up to +250°C.</p>

* The above pictures and descriptions are not contractual and not exhaustive.

4. Axial impellers on request

Picture *	Type	General description *
	MHA-X	  <p>Customized solutions for axial impellers with diameter larger than 1.280 mm and up to 2.000 mm. Blades in aluminum, PP or ATEX materials. Working temperature from -40°C up to +120°C.</p>

* The above pictures and descriptions are not contractual and not exhaustive.

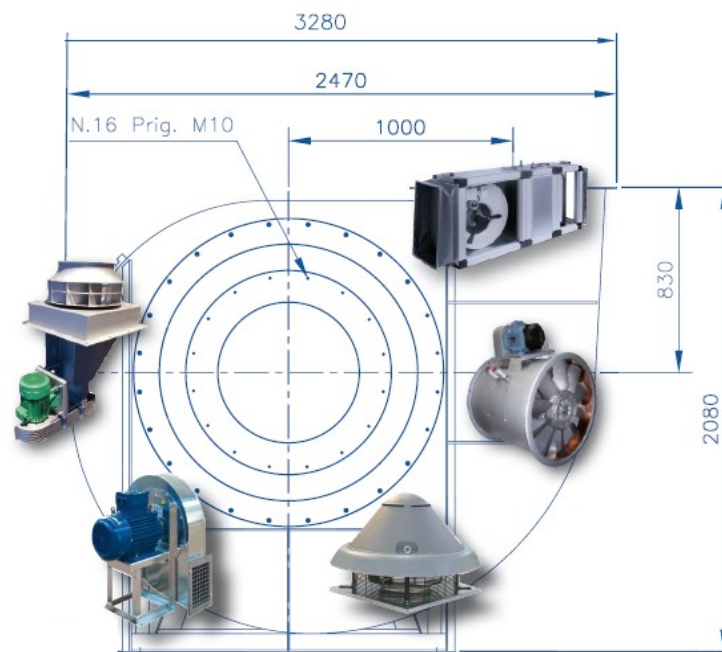

Contact :

MARELLI
Industrial Ventilation Solutions
Rue Bollinckxstraat 241-243
BE – 1190 Brussels

Tel : +32 (0)2 511 06 03
sales@marelli.be
www.marelli.be